

Faberix Door Handles

Balmoral Inline Lever Lever



Feature:

- Solid die cast Sturdy feel and consistent 90 degree lever return
- Sculpted ergonomic lever and low friction nylon bush Easy to grip and smooth action
- Supplied with screw and spindle pack to suit 60-70mm profiles Everything needed for installation included
- Colour coordinated screw heads Perfectly matching hardware, even down to the smallest details
- Baseplate in common with all Balmoral handles Same routing detail regardless of product variant chosen
- Wide backplate To suit cylinder guards and accommodate larger cylinder preparation
- Supplied with care instructions Helps the homeowner to keep the hardware in optimal condition
- Supplied fully assembled Simple and quick installation, no need to fit springs or lever
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit



Silver



Grey



Black



Hardex





Hardex

Satin

White

Gold



Hardex Graphite



Black



Rose



Pewter















Balmoral Inline Lever Lever

| Ordering Details Product Balmoral Inline Lever Lever | | | | |
|--|-----------|--|---------------|----------|
| | | | Finish | Part No. |
| | | | Hardex Chrome | 1D001 |
| Hardex Satin | 1D002 | | | |
| Hardex Bronze | 1D003 | | | |
| Hardex Gold | 1D005 | | | |
| Hardex Graphite | 1D008 | | | |
| Hardex Pewter | 1D009 | | | |
| Hardex Rose | DHABLHRIL | | | |
| Antique Black | 1D006 | | | |
| Anthracite Grey | 1A004 | | | |
| White | 1A000 | | | |
| Black | 1A001 | | | |
| Silver | 1A002 | | | |

For additional part numbers please contact our sales office.

Technical Information Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

Operation

Endurance tested in excess of 200,000 cycles

Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set. 30 minute fire test to BS 476: Part 20/22: 1987

Material Specification

| r laterial specification | |
|----------------------------|---|
| Handle Grip and Backplate: | High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black, Anthracite Grey and Silver finishes |
| Coatings: | Hardex Chrome, Hardex Satin, Hardex Bronze, Hardex Gold, Hardex Graphite, Hardex Pewter, Hardex Rose, Anthracite Grey, Antique Black, White, Black and Silver |
| Spindle / Screws: | Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (1 x 8mm x 120mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws) |
| Cylinder: | Euro Cylinder, 92mm PZ |
| | |


Maintenance


For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.

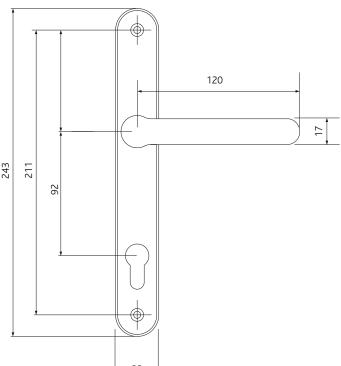

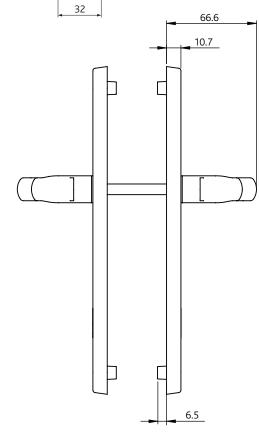

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.